TO THE POINT QUILT PROJECT

Beginner friendly!

Featuring JAIPUR | Jayme Murray



CLOUD9 FABRICS

INFO & MATERIALS

TO THE POINT QUILT

SIZE: 44" x 60"

DESIGNER: Michelle Engel

TECHNICAL EDITOR: Linda Spiridon

This project uses 8 different fabrics See chart below for fabric quantities 1¾ yd background fabric ½ yd binding 3 1/8 yd backing

Note: All possible care has been taken to assure the accuracy of this pattern. We are not responsible for printing errors or the manner in which individual work varies. Please read instructions carefully before starting the construction of this quilt. If desired, wash and iron your fabrics before starting to cut.

OUILT FACE MATERIALS

Cutting dimensions include 1/4" seam allowances.

²/₃ yd each of 8 different printed fabrics (see chart below) 7-6¾" x 9¾" rectangles in each fabric



FABRIC A



FABRIC E

228198

FABRIC B



FABRIC F

228210



FABRIC C



FABRIC G



FABRIC D



FABRIC H

1¾ yd background fabric

28-6¾" x 9¾" rectangles

Use a solid fabric that is the same color on both sides and has no pattern

228201



BACKGROUND FABRIC


DIAGRAMS







fig 3












CUTTING DIRECTIONS

FABRICS A, B, C & D: cut each of the fabrics on the diagonal from upper left to lower right [fig 1] You will only use the LOWER LEFT triangles in the quilt. Set upper right triangles aside.

FABRICS E, F, G & H: cut each of the fabrics on the diagonal from upper right to lower left [fig 2] You will only use the LOWER RIGHT triangles in the quilt. Set upper left triangles aside.

BACKGROUND: Cut rectangles on the diagonal from upper right to lower left corner. [fig 2]

Set aside all triangles to use as upper right corner triangle to use with FABRICS A, B, C & D Set aside all triangles to use as upper left corner triangle to use with FABRICS E, F, G & H

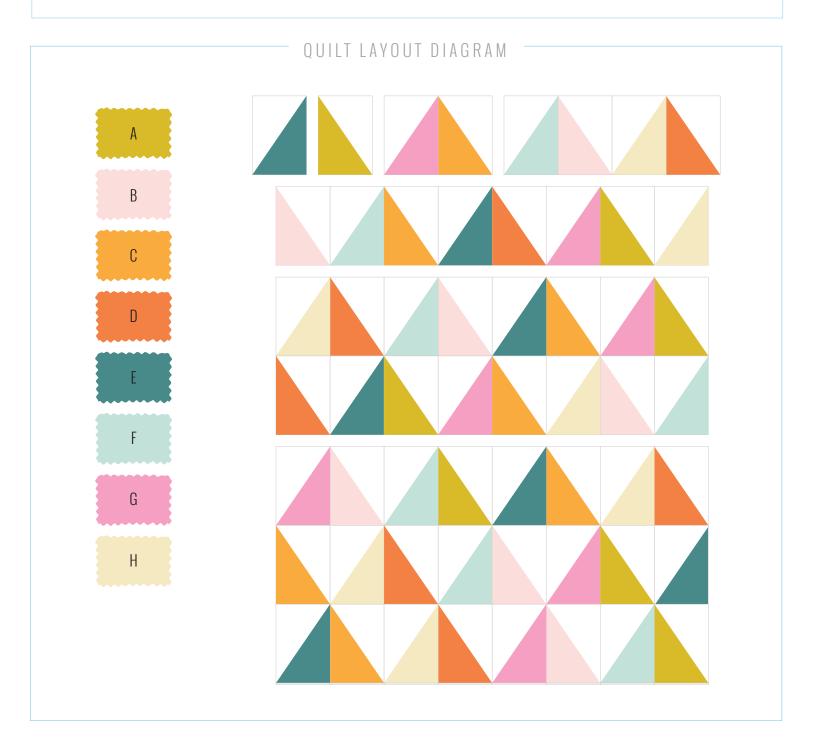

ASSEMBLY DIRECTIONS

- 1. Sew all background triangles to FABRICS A, C, E & G. All prints will be in the LOWER LEFT corner and background will be in upper right. Lay pieces flat RS up. Flip background fabric on top of print (right side up), matching edges. Sew with ¼" seam allowance. [fig3] This is a bias edge, do not pull or stretch. Press seams to the print.
- 2. Sew all background triangles to FABRICS B, D, F & H. All prints will be in the LOWER RIGHT corner and background will be in upper left. Lay pieces flat RS up. Flip background fabric on top of print (right side up), matching edges. Sew ¼" seam. [fig3] This is a bias edge, do not pull or stretch. Press seams to the print.
- 3. Square up all triangles to measure 6" x 9" making sure the diagonal line meets exactly in the corner. [fig 3 & fig 5] It is important to have the diagonal line aligned on the ruler.
- 4. Layout pieced rectangles in rows referring to the QUILT LAYOUT DIAGRAM for placement.
- 5. Sew rectangles into rows. Sew 7 horizontal rows together, pressing seams as you go.
- 6. Layer the backing, batting and quilt top. Baste, quilt and bind.